



Sound insulation


The sound insulation of a movable wall is defined by International Standard Laboratory measurements in accordance with ISO 140-3.

In building practice, the sound insulation between two rooms will always be affected by the surrounding construction.


Sound waves will pass through and under flooring (carpet), through walls and windows, above suspended ceilings and through ventilation ducts.

Through our long extensive knowledge we can advise you at the design stage in order to improve the acoustics of your room.

We will help you with pleasure!

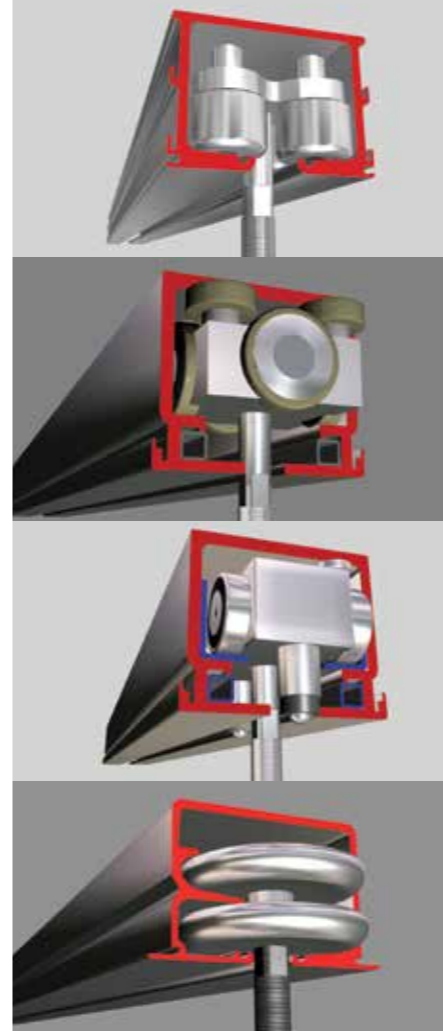

PRODUCT INFORMATION

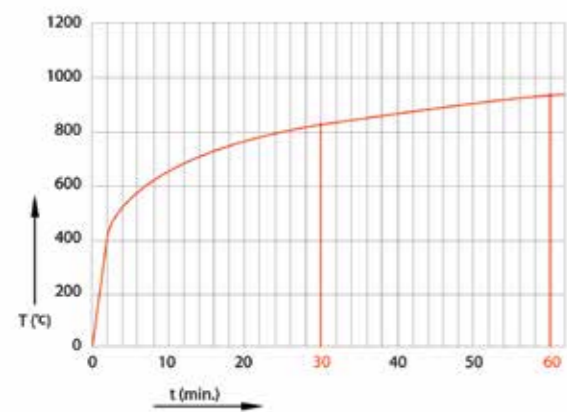

Fire resistance

Parthos continually improves its products and invests heavily in product development.

Also Parthos pays close attention to the European directives concerning fire safety of building products. Specifically spread of flame and thermal insulation are important criteria.

Various tests (in accordance with EN 1364) with renowned Institutes have proved that Parthos is able to produce a movable wall, with integrated pass door, with a 60 minutes fire resistance.

So when fire resistance is a must, you have the choice of the Parthos Palace in either EI 30 or even EI 60.



No right scan be derived from text on this brochure.

018/02

palace

movable walls

PARTHOS

info@parthos.com
www.parthos.com



50 YEARS
worldwide space solutions
mobile wall systems & interior contracting



50 YEARS
worldwide space solutions
mobile wall systems & interior contracting

Product information



Palace 80



Palace 90



Palace 90I



Palace 110 S



Palace 110SI




Palace 110SI EI30 inlaid edges

Type	80	90/90 I	110 S/110SI	110 SI EI30	110 SI EI60	Transpalace	Transpalace 80 single glas / 'outdoor'	XXL sliding walls
Panel thickness	80 mm	90=95/90 I=90 mm	110 mm	110 mm	110 mm	100 mm	80 mm	100 mm
Panel height	1500 - 3050 mm	1500 - 4050 mm	1500 - 15000 mm	1500 - 15000 mm	1500 - 15000 mm	1500 - 3500 mm	1500 - 3500 mm	1500 - 15000 mm
Panel width	600 - 1240 mm	600 - 1240 mm	600 - 1240 mm	600 - 1240 mm	600 - 1240 mm	600 - 1240 mm	600 - 1240 mm	600 - 15000 mm
Frame construction	aluminium / wood	aluminium / wood	aluminium / steel	aluminium / steel	aluminium / steel	aluminium	aluminium	rectangular tubes steel frame
Board material	10 mm, part of the construction	90=18 mm, 90 I= 16 - 20 mm part of the construction	14 - 18 mm, carried by the construction	16 - 18 mm, fire retardant Class 1, carried by the construction	19 - 22 mm, fire retardant Class 1, carried by the construction	8 mm, safety glass carried by the construction	10 - 20 mm, insulated safety glass carried by the construction	16 - 25 mm, fire retardant Class 1, project related based upon similar Palace 110SI
Fire safety	optional fire-retardant Class 1	optional fire-retardant Class 1	optional fire-retardant Class 1	30 minutes fire-resistant	60 minutes fire-resistant	Your Parthos distributor will be pleased to supply you with detailed (technical) information.	Your Parthos distributor will be pleased to supply you with detailed (technical) information.	Your Parthos distributor will be pleased to supply you with detailed (technical) information.
Vertical profiles	aluminium, anodized, with sealing profiles	aluminium, anodized, with sealing profiles 90 > visible 90 I > invisible	aluminium, anodized, with magnetic strips and sealing profiles 110 S > visible 110 SI > invisible	inlaid, aluminium, anodized, with magnetic strips and sealing profiles	inlaid, aluminium, anodized, with magnetic strips and sealing profiles	aluminium, anodized, with sealing profiles	aluminium, anodized, with sealing profiles	anodized profiles, visible or invisible, with magnetic strips and sealing profiles
Pressure sleeves	aluminium, black with double sealing profiles	aluminium, black with double sealing profiles	aluminium, black with double sealing profiles	aluminium, black with double sealing profiles	aluminium, black with double sealing profiles	aluminium, black with double sealing profiles	aluminium, black with double sealing profiles	aluminium, black with double sealing profiles or flexible sweep seals
Operation of pressure sleeves	manual	manual	manual, or electrical	manual, or electrical	manual, or electrical	manual or electrical	manual or electrical	manual, electrical or fully automatic
Doors	single or double door in panel or fixed single door	single or double door in panel or fixed single door	single or double door in panel or fixed single door	single door in panel	single door in panel	single door in panel or fixed single door	single door in panel or fixed single door	single door in panel
Sound insulation	36 - 44 dB	37 - 48 dB	37 - 57 dB	45 - 56 dB	45 - 56 dB	46 dB	± 40 dB	37 dB - 58 dB*
R _w Weight (depending on sound insulation value)	approx. 20 - 37 kg/m ²	approx. 32 - 50 kg/m ²	approx. 31 - 56 kg/m ²	approx. 33 - 65 kg/m ²	approx. 33 - 75 kg/m ²	approx. 65 kg/m ²	approx. 50 kg/m ²	ca. 37 - 75 kg/m ²

The dB-values have been measured according to EN ISO 140-3 1995.
Test reports are available on demand.
* Walls as tested with Palace 110S

Other product versions and sizes on request.
Your Parthos distributor will be pleased to supply you with detailed (technical) information.



between walls next to the wall

XXL sliding walls



Transpalace 80 single glass



Transpalace 80



AP with edge



Palace 110SI EI60 inlaid edges



Adjusting panel



Standard panel



Wicket door panel



Double wicket door panel



Passdoor wall fixed, full height



Panel with glass opening



Corner panel



Curved panel